




UNIVERSAL FLOAT SWITCH

Installation Instruction

This Float Switch will make any DC Bilge Pump Automatic. To mount the Float Switch.

1. Locate a flat surface in the bilge that is at least 1/4" higher than the strainer base of the bilge pump.
2. Mount Float Switch with screws provided.
3. Connect wires as shown in the wiring diagram. If you are replacing a float switch, reconnect wires to the new switch.
4. Keep all wire connections above the highest water level and seal with marine grade sealant.

Simple System-Provides Automatic Operation For Pump

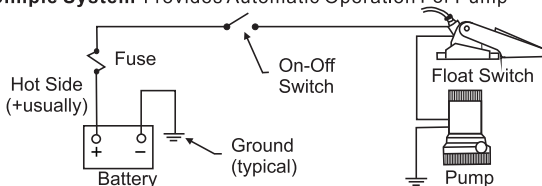

NOTE: Regularly clean debris from around the switch or integral switch guard. This will allow water to flow freely to the float.



KEEP ALL WIRE CONNECTIONS ABOVE THE HIGHEST WATER LEVEL. WIRES SHOULD BE SEALED WITH A WATERPROOF MARINE SEALANT TO PREVENT CORROSION.